



Step 1:

Install the oil-cooler at the bottom portion of the Left radiator (Picture 1). Be sure to install the oil cooler lines to the fittings on the oil cooler.


Picture 1



Step 2:

Assemble the oil-cooler and radiator back onto the frame with the stock bolts(Like Picture2).


Picture 2

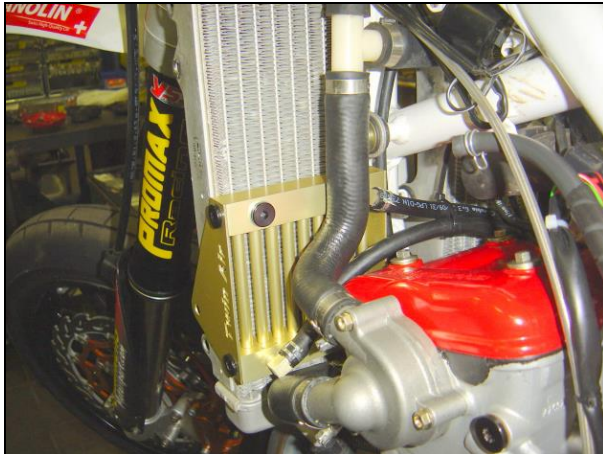


Step 3:

Put some Vaseline on the o-ring on the inside of the cap so it sticks on the cap; assembly the oil filter like picture 3 and 4.

Picture 3

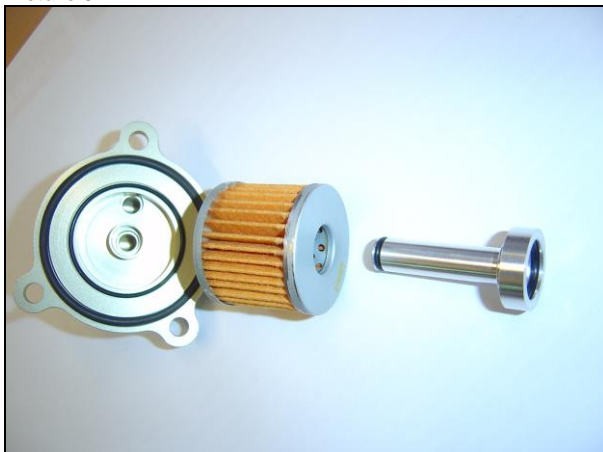

Picture 4

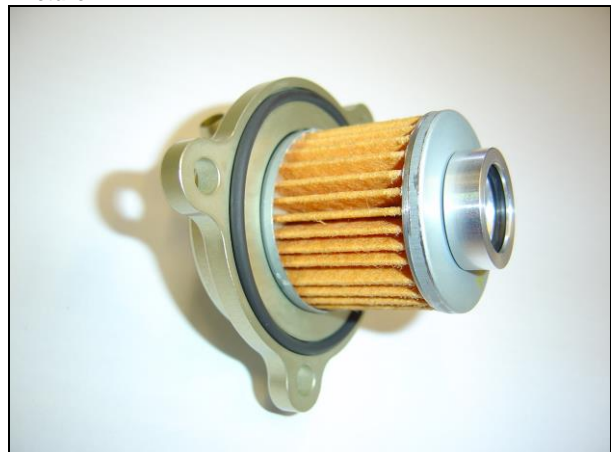


Step 4:

Install the oil cooler hoses like the assembly diagram (like picture 5 and 6)


Hose 1 connects oil-out from the filter cap to oil-in on the radiator (cut the hose to the length).

Hose 2 connects oil-out from the radiator to oil-in on the filter cap (cut the hose to the length)

Picture 5

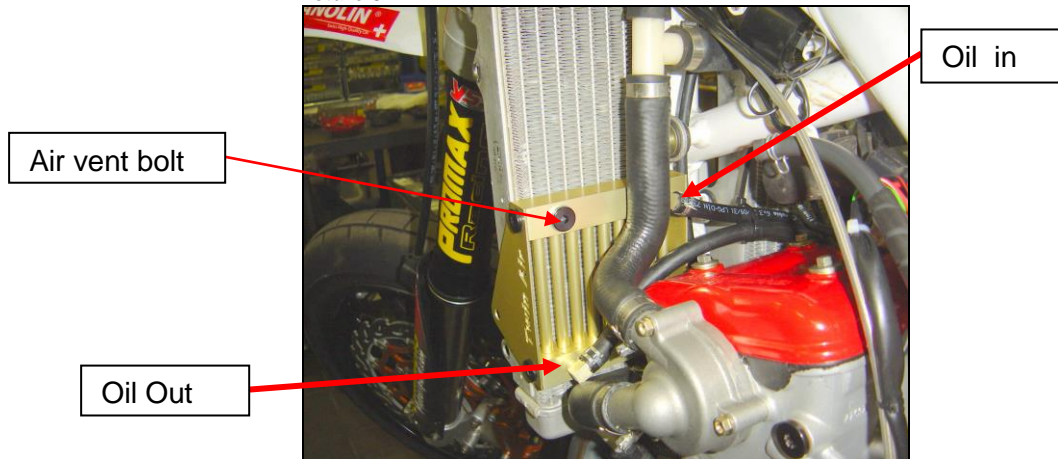

Picture 6

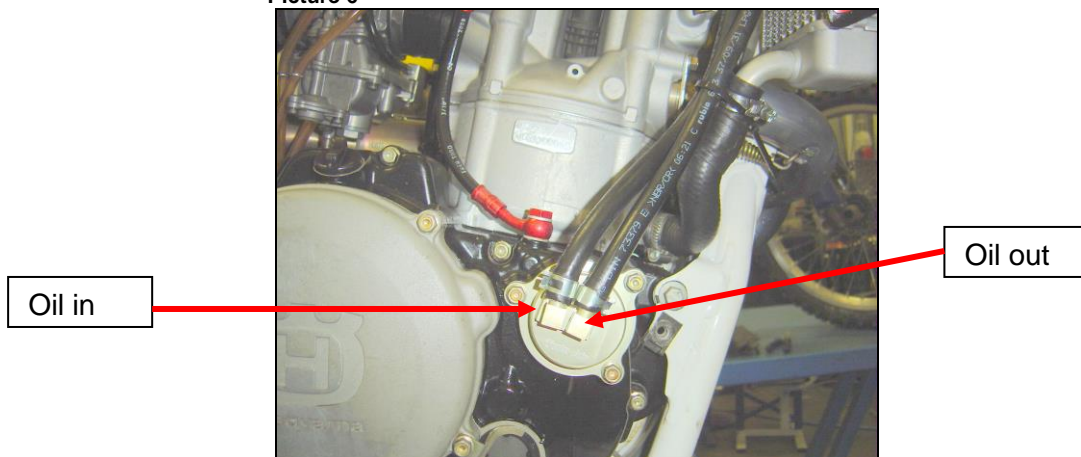


Step 5:

Use two nylon zip ties to attach the oil-hoses to the water-hose (Like picture 7 and 8)

Picture 7



Picture 8

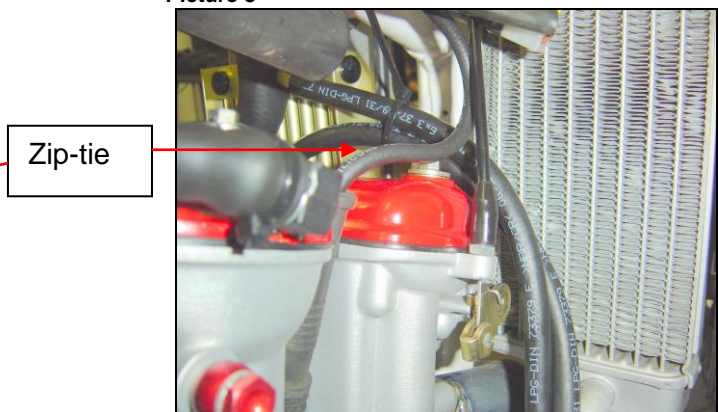



Step 6:

Fill the engine with oil, adding 150 ml more oil.

Step 7:

Start the engine and let it idle.

Step 8:

Stop the engine after 2 minutes and check if there is air in the cooler by opening the air vent bolt (picture 5). If oil comes out, the system has been bleed properly. If air comes out, redo step 7 and 8 until oil comes out.

Step 9:

Check oil level and top off if necessary.

*The replacement Oil Filter for this Oil Cooling System is: 140.118.
The replacement O-ring set for this Oil Cooling System is: 160.508.*